

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representation of  
The original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : <b>G01N 21/35, G01J 5/02</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 99/28729</b> (43) International Publication Date: 10 June 1999 (10.06.99)</p>
<p>(21) International Application Number: PCT/US98/25771 (22) International Filing Date: 4 December 1998 (04.12.98) (30) Priority Data: 60/067,713 4 December 1997 (04.12.97) US 60/094,602 30 July 1998 (30.07.98) US (71) Applicant (for all designated States except US): ION OPTICS, INC. [US/US]; Suite 144, 411 Waverly Oaks Road, Waltham, MA 02154 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): JOHNSON, Edward, A. [US/US]; Suite 103, 41 North Road, Bedford, MA 01730 (US). BODKIN, William, Andrew [US/US]; 37 Forest Street, Needham, MA 02192 (US). (74) Agents: LAPPIN, Mark, G. et al.; Lappin &amp; Kusmer LLP, 200 State Street, Boston, MA 02109 (US).</p>		<p>(81) Designated States: AU, CA, JP, NO, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p>(54) Title: <b>GAS DETECTION APPARATUS USING A COMBINED INFRARED SOURCE AND HIGH TEMPERATURE BOLOMETER</b></p> <div data-bbox="422 1176 1218 1701"></div> <p>(57) Abstract An improved gas detector apparatus (100) includes a spectral source/bolometer (102) for conducting an electrical current and for producing infrared radiation. The source/bolometer has a characteristic resistance that is a predetermined function of the source/bolometer temperature. A concentrating reflector (104) directs the infrared radiation through a spectral filter (106) and the gas. A return reflector (108) is disposed along the axis beyond the spectral filter and the gas, such that at least a portion of the infrared radiation passing through the filter and the gas is reflected back through the gas and the filter to the source/bolometer. A driver/detector (110) drives a current through the source/bolometer, determines the characteristic resistance of the source/bolometer, and detects the gas from a variation of the characteristic resistance.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## GAS DETECTION APPARATUS USING A COMBINED INFRARED SOURCE AND HIGH TEMPERATURE BOLOMETER

### 5 CROSS-REFERENCE TO RELATED APPLICATIONS

The present application is based on provisional application, U.S. Serial No. 60/067,713, filed on December 4, 1997 by William Andrew Bodkin, entitled INFRARED SPECTRAGRAPHIC SYSTEM, and U.S. Provisional Patent Application Serial No. 60/094,602, filed on July 30, 1998,  
10 by Edward A. Johnson.

This application is related to U.S. Provisional Patent Application Serial No. 60/096,133 which is hereby incorporated by reference.

### STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH

15 Not Applicable

### REFERENCE TO MICROFICHE APPENDIX

Not Applicable

### 20 FIELD OF THE INVENTION

The field of the invention is electro-optical radiation sources and detectors, and more particularly, to an apparatus that simultaneously functions as an electro-optical radiation source and an electro-optical radiation detector.

25

### BACKGROUND OF THE INVENTION

Non-dispersive Infrared (NDIR) techniques utilizing the characteristic absorption bands of gases in the infrared have long been considered as one of the best methods for composite gas measurement.  
30 These techniques take advantage of the fact that various gases exhibit substantial absorption at specific wavelengths in the infrared radiation spectrum. The term "non-dispersive" refers to the type of apparatus

incorporating this particular measurement technique, typically including a narrow band pass interference filter (as opposed to a "dispersive" element, such as a prism or a diffraction grating) to isolate and pass radiation in a particular wavelength band from a spectrally broad band infrared source.

5 The gas concentration is discerned from the detected intensity modulation of source radiation that is passed by the filter coincident in wavelength with a strong absorption band of the gas to be measured.

A prior art NDIR gas analyzer typically includes a discrete infrared source with a motor-driven mechanical chopper to modulate the source so  
10 that synchronous detection may be used to discriminate spurious infrared radiation from surroundings; a pump to push gas through a sample chamber; a narrow band-pass interference filter; a sensitive infrared detector, and infrared optics/windows to focus the infrared energy from the source onto the detector. Although the NDIR gas measurement technique is recognized  
15 as one of the most effective methodologies for composite gas measurement available, it has not enjoyed wide application because of its complexity and high cost of implementation.

Infrared absorption instruments traditionally contain a source of infrared radiation, a means of spectral selection for the gas under study, an  
20 absorption cell with associated gas sample handling and/or conditioning, any necessary optics, a sensitive infrared detector, and associated signal processing electronics. A typical source of infrared radiation includes an incandescent filament or a thin film conductor. The emissions spectrum of the infrared source may be tailored via surface texturing techniques, as are  
25 described in U.S. Patent No. 5,838,016. The invention simplifies and reduces the cost of an infrared instrument by integrating the function of the infrared source and infrared detector into a single self-supporting thin-film bolometer element. This element is packaged with inexpensive molded plastic optics and a conventional spectral filter to make a transistor-size  
30 "sensor engine." Combined with a simple reflector plate to define the gas sampling region, this sensor engine provides a complete gas sensor

instrument which is extremely inexpensive and which will approach the sensitivity of conventional infrared absorption instruments.

#### SUMMARY OF THE INVENTION

5           The present invention is an apparatus for detecting a gas having a distinct infrared radiation absorption characteristics. The apparatus includes a spectral source/bolometer for conducting an electrical current and for producing an infrared radiation. The source/bolometer is disposed along an axis and has a temperature and a characteristic resistance; the characteristic  
10           resistance is a predetermined function of the temperature. The apparatus further includes a concentrating reflector for directing the infrared radiation along the axis, first through a spectral filter and then through the gas. The apparatus also includes a return reflector disposed along the axis beyond the spectral filter and the gas, such that at least a portion of the infrared radiation  
15           passing through the filter and the gas is reflected back through the gas and the filter to the source/bolometer. The apparatus further includes a driver/detector for driving a current through the source/bolometer, for determining the characteristic resistance, and for detecting the gas from a variation of the characteristic resistance.

20           In one embodiment, the source/bolometer includes a thin-film conductor.

          In another embodiment, the source/bolometer includes a filament conductor.

          In another embodiment, the source/bolometer includes surface  
25           texturing so as to tailor a spectral characteristic of the infrared radiation.

          In a further embodiment, the concentrating reflector is disposed about the axis so as to form a first aperture along the axis and a second aperture along the axis, the source/bolometer is disposed at the first aperture and the spectral filter is disposed at the second aperture.

30           In another embodiment, the concentrating reflector forms a compound parabolic concentrator.

In another embodiment, the return reflector defines a gas sampling region.

In another embodiment, the return reflector includes a flat reflective surface disposed substantially perpendicular to the axis.

5 In another embodiment, the return reflector includes a contoured reflective surface disposed substantially about the axis.

In one embodiment, the contoured reflective surface includes a parabolic surface.

10 In another embodiment, the spectral filter substantially passes infrared radiation within a first passband and substantially blocks infrared radiation outside of the first passband.

In a further embodiment, the spectral filter includes a micromesh reflective filter.

15 In another embodiment, the micromesh reflective filter is fabricated using micro-electro-mechanical systems technology.

In yet another embodiment, the driver/detector includes a Wheatstone bridge circuit having a first resistor pair and a second resistor pair, wherein a first resistor of the first resistor pair includes the source/bolometer.

20 In another embodiment, a second resistor of the first resistor pair includes a blind source/bolometer being identical to the source/bolometer and filtered at a second passband.

In another embodiment, a ratio of the first resistor pair is substantially equal to a ratio of the second resistor pair.

## 25 BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects of this invention, the various features thereof, as well as the invention itself, may be more fully understood from the following description, when read together with the accompanying drawings in which:

30 FIG. 1 illustrates one preferred embodiment of a combined infrared source and sensor;

FIG. 2 illustrates another embodiment of the combined infrared source and sensor shown in FIG. 1;

FIG. 3 illustrates a Wheatstone bridge used to drive the source/bolometer component of the source and sensor shown in FIG. 1; and,

5        FIG. 4 shows a test configuration that incorporates the Wheatstone bridge of FIG. 3.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now to the drawings, FIG. 1 illustrates one preferred  
10        embodiment of a combined infrared source and sensor 100 including a spectral source/bolometer 102, a concentrating reflector 104, a spectral filter 106, a return reflector 108 and a driver/detector circuit 110. The concentrating reflector 104 is disposed substantially symmetrically about an axis 112 so as to form a first aperture 114 and a second aperture 116. The  
15        source/bolometer 102 is disposed along the axis 112 at the first aperture 114 so as to direct the infrared radiation from the source/bolometer 102 along an axis 112 toward the second aperture 116. The return reflector 108 is disposed along the axis 112 such that the infrared radiation from the source/bolometer 102 directed along the axis 112 is reflected back along the  
20        axis 112 through the second aperture 116 toward the source/bolometer 102. The spectral filter 106 is disposed along the axis 112 at the second aperture 116. Infrared radiation passing through the second aperture 116 (either from the source/bolometer 102 to the return reflector 108, or vice versa) passes through and may be modified by the spectral filter 106. The driver/detector  
25        circuit 110 is electrically coupled to a first terminal 118 and a second terminal 120 of the source/bolometer 102 via a first electrical conductor 122 and a second electrical conductor 124, respectively.

The spectral source/bolometer 102 may include a filament, a thin-film element or other infrared radiating components known to those in the art.  
30        The first terminal 118 and the second terminal 120 are electrically coupled to the source/bolometer 102 such that an external driver (e.g., the



driver/detector circuit 110) can apply a voltage across the source/bolometer 102 via the first terminal 120 and the second terminal 122, thereby inducing current flow through the source/bolometer. In one preferred embodiment, the surface of the source/bolometer may be textured so as to selectively  
5 tailor the infrared emissions spectrum to substantially match the absorption characteristics of the target gas to be detected.

In the illustrated embodiment of the invention, the concentrating reflector 104 includes a parabolic reflector, although other reflector shapes (e.g., spherical, conical and custom contoured) may be used to adequately  
10 direct the infrared radiation from the source/bolometer 102 along the axis 112. Similarly, although the embodiment illustrated in FIG. 1 includes a flat reflector, other reflector shapes may be use. The spectral filter 106 may include any one of several conventional designs known to those in the art to achieve tight spectral control of the infrared emission. In general, the  
15 spectral filter 106 passes only infrared radiation that is within a predetermined passband. The predetermined passband is chosen as a function of the target gas to be detected.

The electrical resistance  $R$  of the source/bolometer 102 varies as a function of its equilibrium temperature  $T$ , i.e.,  $R = f\{T\}$ . The function  $f\{T\}$   
20 may be determined empirically or analytically for a particular source/bolometer 102. For a given amount of input power applied to the source/bolometer 102, the equilibrium temperature  $T$  of the source/bolometer 102 is dependent upon how fast it cools, and the cooling rate of the source/bolometer 102 is dependent on the optical absorption  
25 characteristics of its immediate environment. In general, different gases are known to each exhibit distinct optical absorption characteristics. The spectral filter 106 may be selected such that the infrared source and sensor 100 forms a tuned cavity band emitter corresponding to the absorption characteristics of the gas under study. Thus, the gas may be detected in the  
30 presence of the source/bolometer 102 by monitoring the resistance  $R$  of the source/bolometer 102.

FIG. 2 illustrates another embodiment of the present invention, that forms an infrared gas monitoring component 200 of an integrated on-board exhaust NO<sub>x</sub> meter (where x is a positive non-zero integer). This embodiment utilizes silicon micro-machining technology to construct a sensor that is radically simpler than conventional infrared absorption instruments. This embodiment simplifies and reduces the cost of an infrared absorption instrument by integrating the function of the infrared source and infrared detector into a single self-supporting thin-film source/bolometer 102. The source/bolometer 102 includes inexpensive molded plastic optics and a conventional spectral filter 106 to make a transistor-size sensor engine 202. Combined with a simple reflector plate to define the gas sampling region, this sensor engine provides a complete gas sensor instrument which is extremely inexpensive and which will approach the sensitivity of conventional infrared absorption instruments.

The embodiment of FIG. 2 illustrates a novel, low-cost infrared gas sensor using a thin-film source/bolometer 102 in an open path atmospheric gas measurement. As described herein, the source/bolometer 102 reaches radiative equilibrium with its surroundings at a slightly lower temperature if gas absorption frustrates light re-imaging source/bolometer 102. The concentrating reflector 104, in this case a compound parabolic concentrator, defines a relatively narrow illumination cone (+/- 15 degrees about the axis 118) and the passive return reflector 108 is contoured to provide a pupil-image of the spectral filter 106 onto itself. The entire sensor engine 202 can be mounted in a substantially small package, e.g., on a TO-8 transistor header.

Tight spectral control of the infrared emission is important in making the source/bolometer 102 work well. The device is particularly effective if the amount of radiation absorbed by gas molecules under study is measurably large in terms of the overall thermal budget of the bolometer surface. Thus, a tuned cavity band emitter is preferably constructed with spectral resolution (dl/l) around 0.1, roughly the performance achieved to date

with micromesh reflective filters. This increases the conversion efficiency to nearly 15% for the NO<sub>x</sub> application. This level of surface topology (and therefore spectral) control, is achieved through micro-electro-mechanical systems (MEMS) technologies. An individual emitter die is packaged, together  
5 with individual infrared detector pixel elements and thin film interference filter windows in TO-8 transistor cans using standard process equipment.

The embodiment illustrated in FIG. 2 uses drive and readout schemes having a microprocessor controlled, temperature-stabilized driver to determine resistance from drive current and drive voltage readings. The current and  
10 voltage information shows that incidental resistances (temperature coefficients in leads and packages and shunt resistors, for instance) do not overwhelm the small resistance changes used as a measurement parameter. The Wheatstone bridge 300 shown in FIG. 3, a straightforward analog control circuit, is used to drive the source/bolometer 102 and determine the incremental resistance values. The  
15 Wheatstone bridge is simple and accurate, is substantially insensitive to power supply variations and is relatively insensitive to temperature. The circuit is "resistor" programmable, but depends for stability on matching the ratio of resistors. In one form of the invention, an adjacent "blind" pixel, i.e., an identical bolometer element (a blind source/bolometer), filtered at some different  
20 waveband, is used as the resistor in the other leg of the bridge, allowing compensation for instrument and component temperatures and providing only a difference signal related to infrared absorption in the gas. The Wheatstone bridge provides a simple computer interface, and since it is implemented with relatively robust analog parts, it is not susceptible to radiation damage at high  
25 altitudes or in space. For the Wheatstone bridge 300 shown in FIG. 3, bridge is balanced when the ratio of the resistor pair R1 and R2 is substantially equal to the ratio of the resistor pair R3 and R4 (i.e.,  $R1/R2 = R3/R4$ ), and to first order, temperature coefficients of R1 and R2 can be neglected if resistors are matched. The temperature coefficient of R3 is important but should have negligible effect  
30 across the relatively small change in temperature of the bolometer caused by the gas absorption. Preferably, the resistors are chosen so that the bridge is

substantially balanced at the target operating temperature. The estimated errors from an analog readout of this circuit come from the amplifier input offset and input bias currents which introduce offset voltage or error term. FIG. 4 shows a test configuration that incorporates the Wheatstone bridge 300. Note that the component reference designations FIG. 4 do not correspond to those in FIG. 3.

5 An optics test bed has been used to evaluate different configurations and perform measurements of this embodiment. In an elevated ambient temperature environment (e.g., automotive), the device is operated as instrumented tube furnaces and to calibrate the infrared readings against a conventional gas  
10 analyzer.

The invention may be embodied in other specific forms without departing from the spirit or essential characteristics thereof. The present embodiments are therefore to be considered in respects as illustrative and not restrictive, the scope of the invention being indicated by the appended claims rather than by the  
15 foregoing description, and all changes which come within the meaning and range of the equivalency of the claims are therefore intended to be embraced therein.

What is claimed is

1. An apparatus for detecting a gas having distinct infrared radiation absorption characteristics, comprising:

5 a spectral source/bolometer for conducting an electrical current and for producing an infrared radiation, said source/bolometer being disposed along an axis and having a temperature and a characteristic resistance, said characteristic resistance being a predetermined function of said temperature;

10 a concentrating reflector for directing said infrared radiation along said axis through said gas;

a return reflector disposed along said axis beyond said gas, such that at least a portion of said infrared radiation passing through said gas is reflected back through said gas to said source/bolometer; and,

15 a driver/detector for driving a current through said source/bolometer, for determining said characteristic resistance, and for detecting said gas from a variation of said characteristic resistance.

2. An apparatus according to claim 1, wherein said source/bolometer includes a thin-film conductor.

20 3. An apparatus according to claim 1, wherein said source/bolometer includes a filament conductor.

25 4. An apparatus according to claim 1, wherein said source/bolometer includes surface texturing tailored so as to have an emission spectrum substantially matched to said absorption characteristics.

30 5. An apparatus according to claim 1, further including a spectral filter disposed along said axis between said source/bolometer and said gas so as to tailor a spectral characteristic of said infrared radiation to substantially match said absorption characteristics.

6. An apparatus according to claim 1, said concentrating reflector being disposed about said axis so as to form a first aperture along said axis and a second aperture along said axis, said source/bolometer being disposed at said first aperture and said spectral filter being disposed at said second aperture.

5

7. An apparatus according to claim 6, wherein said concentrating reflector forms a compound parabolic concentrator.

8. An apparatus according to claim 1, wherein said return reflector defines a gas sampling region.

10

9. An apparatus according to claim 1, wherein said return reflector includes a flat reflective surface disposed substantially perpendicular to said axis.

15

10. An apparatus according to claim 1, wherein said return reflector includes a contoured reflective surface disposed substantially about said axis.

20

11. An apparatus according to claim 10, wherein said contoured reflective surface includes a parabolic surface.

12. An apparatus according to claim 5, wherein said spectral filter substantially passes infrared radiation within a first passband and substantially blocks infrared radiation outside of said first passband.

25

13. An apparatus according to claim 5, wherein said spectral filter includes a micromesh reflective filter.

14. An apparatus according to claim 13, wherein said micromesh reflective filter is fabricated using micro-electro-mechanical systems technology.

30

15. An apparatus according to claim 1, said driver/detector including a Wheatstone bridge circuit having a first resistor pair and a second resistor pair, wherein a first resistor of said first resistor pair includes said source/bolometer.

5 16. An apparatus according to claim 15, wherein a second resistor of said first resistor pair includes a blind source/bolometer being identical to said source/bolometer and filtered at a second passband.

10 17. An apparatus according to claim 15, wherein a ratio of said first resistor pair is substantially equal to a ratio of said second resistor pair.

18. A method of detecting a gas having a distinct infrared radiation absorption characteristics, comprising:

15 conducting an electrical current through a spectral source/bolometer and thereby producing an infrared radiation, said source bolometer being disposed along an axis and having a temperature and a characteristic resistance, said characteristic resistance being a predetermined function of said temperature;

directing said infrared radiation along said axis, first through a spectral filter and then through said gas;

20 reflecting at least a portion of said infrared radiation passing through said filter and said gas back through said gas and said filter to said source/bolometer, and,

driving a current through said source/bolometer, determining said characteristic resistance, and detecting said gas from a variation of said

25 characteristic resistance.

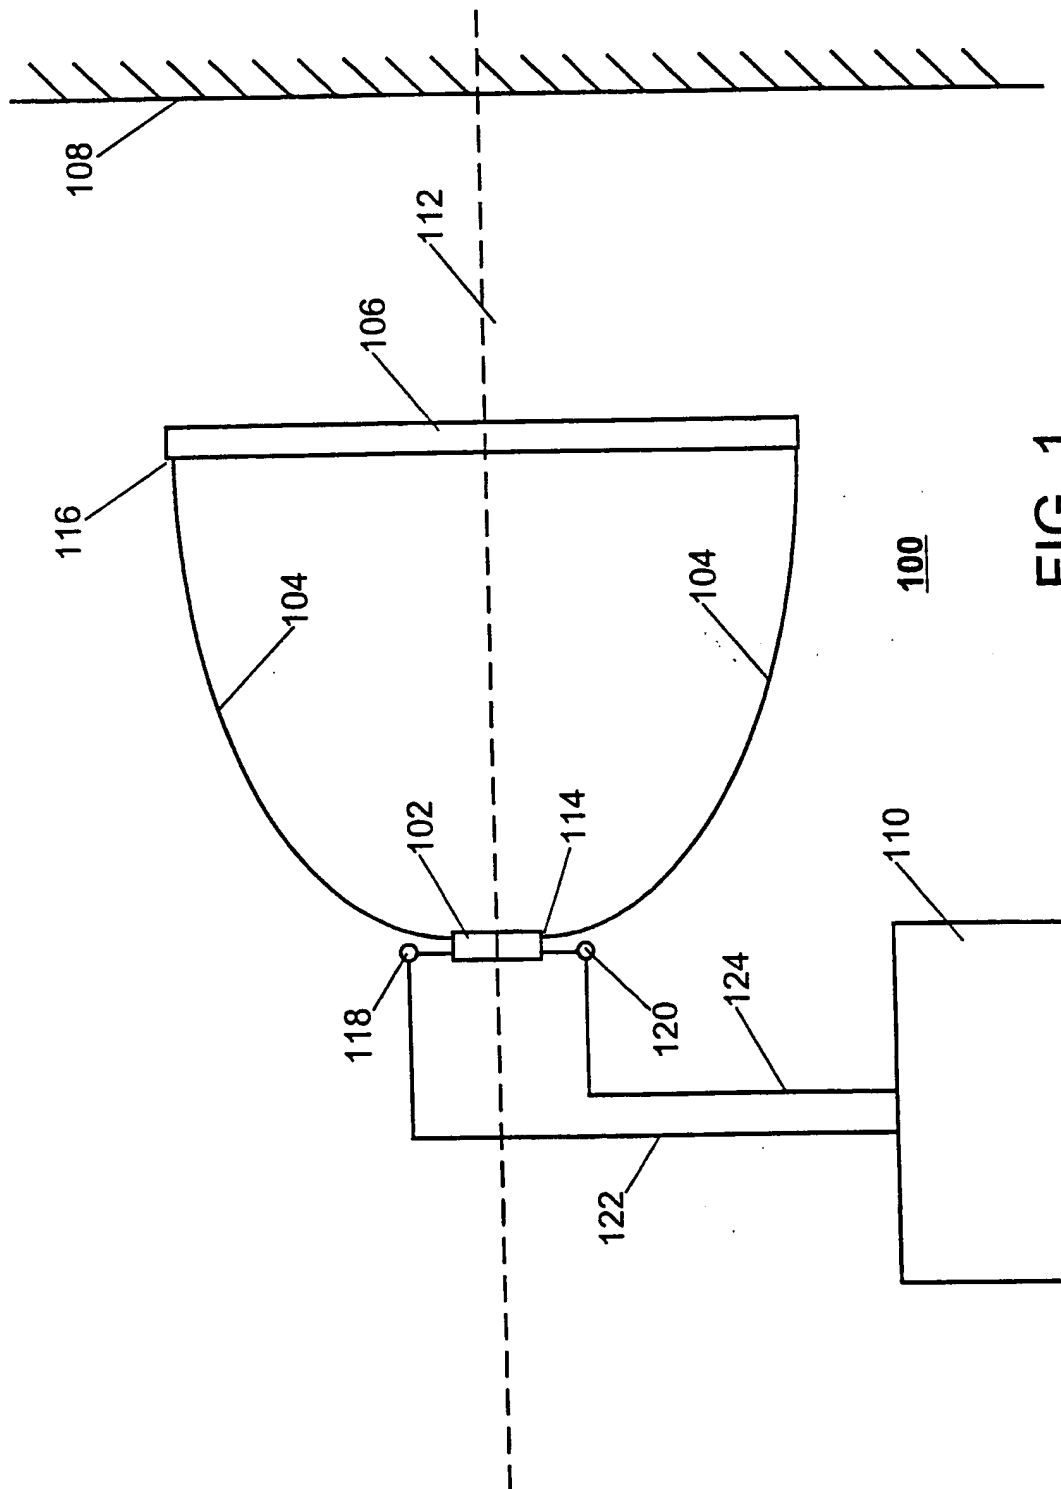


FIG. 1



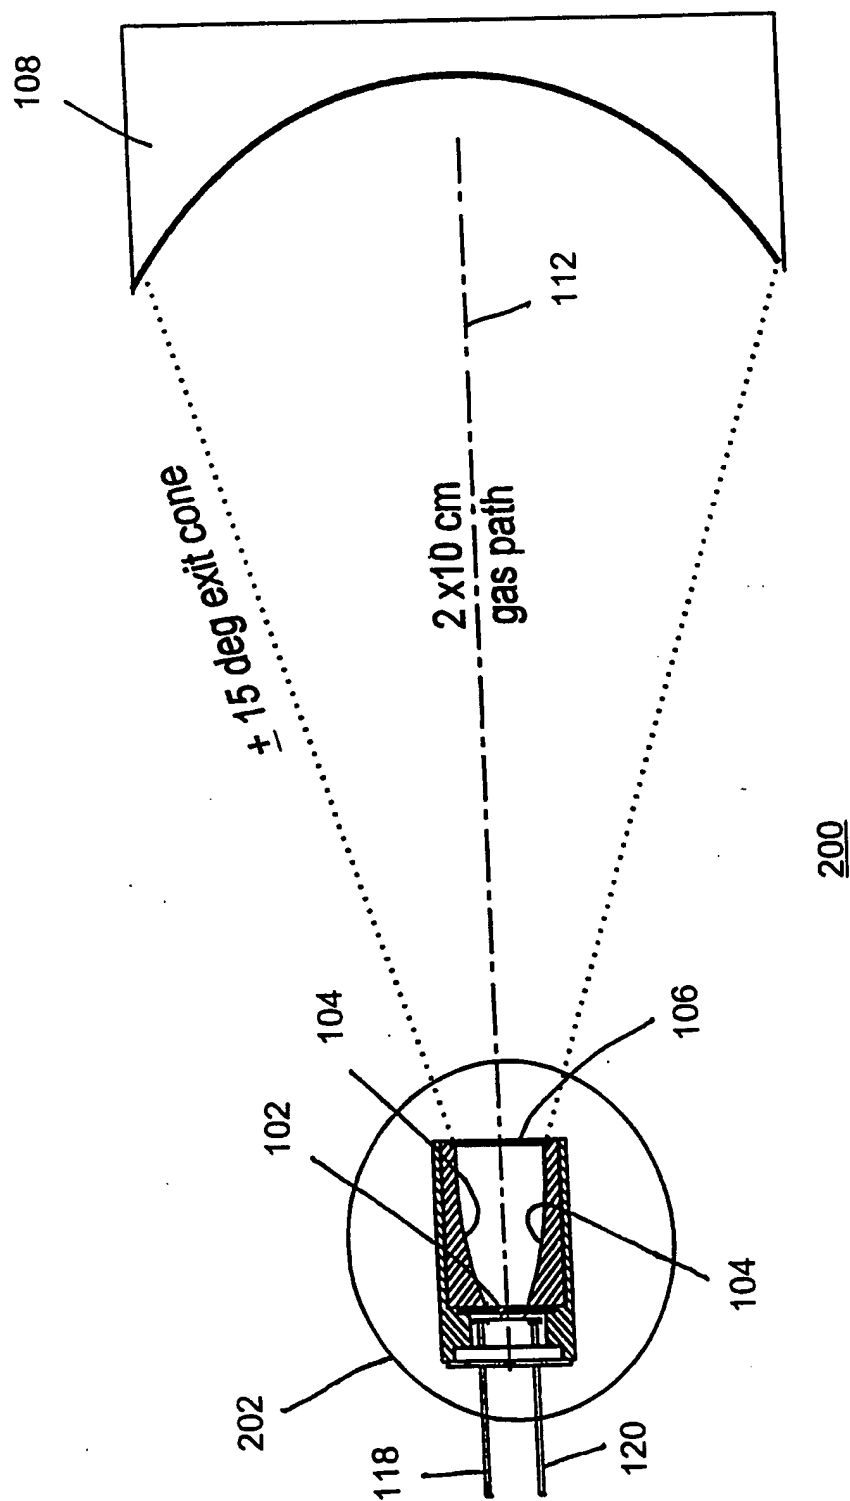


FIG. 2


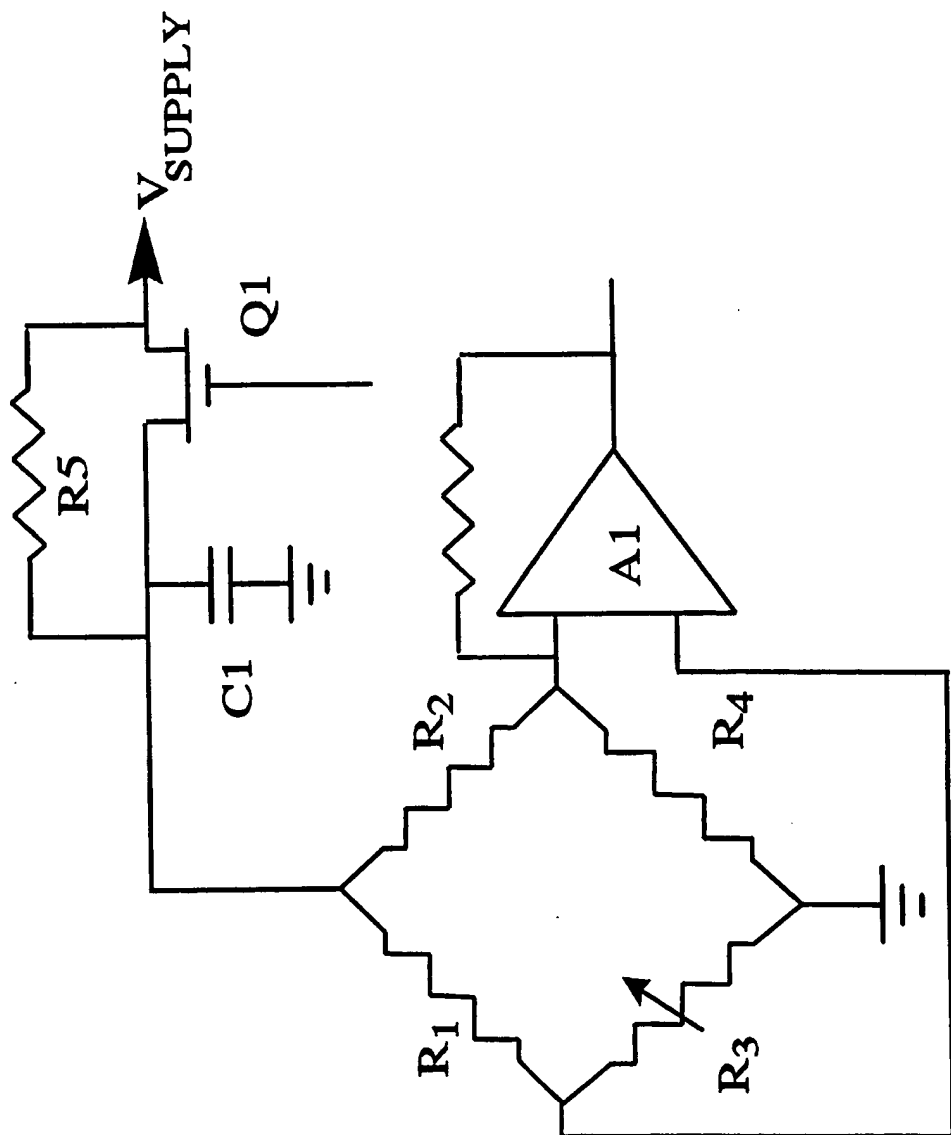


FIG. 3

4/4

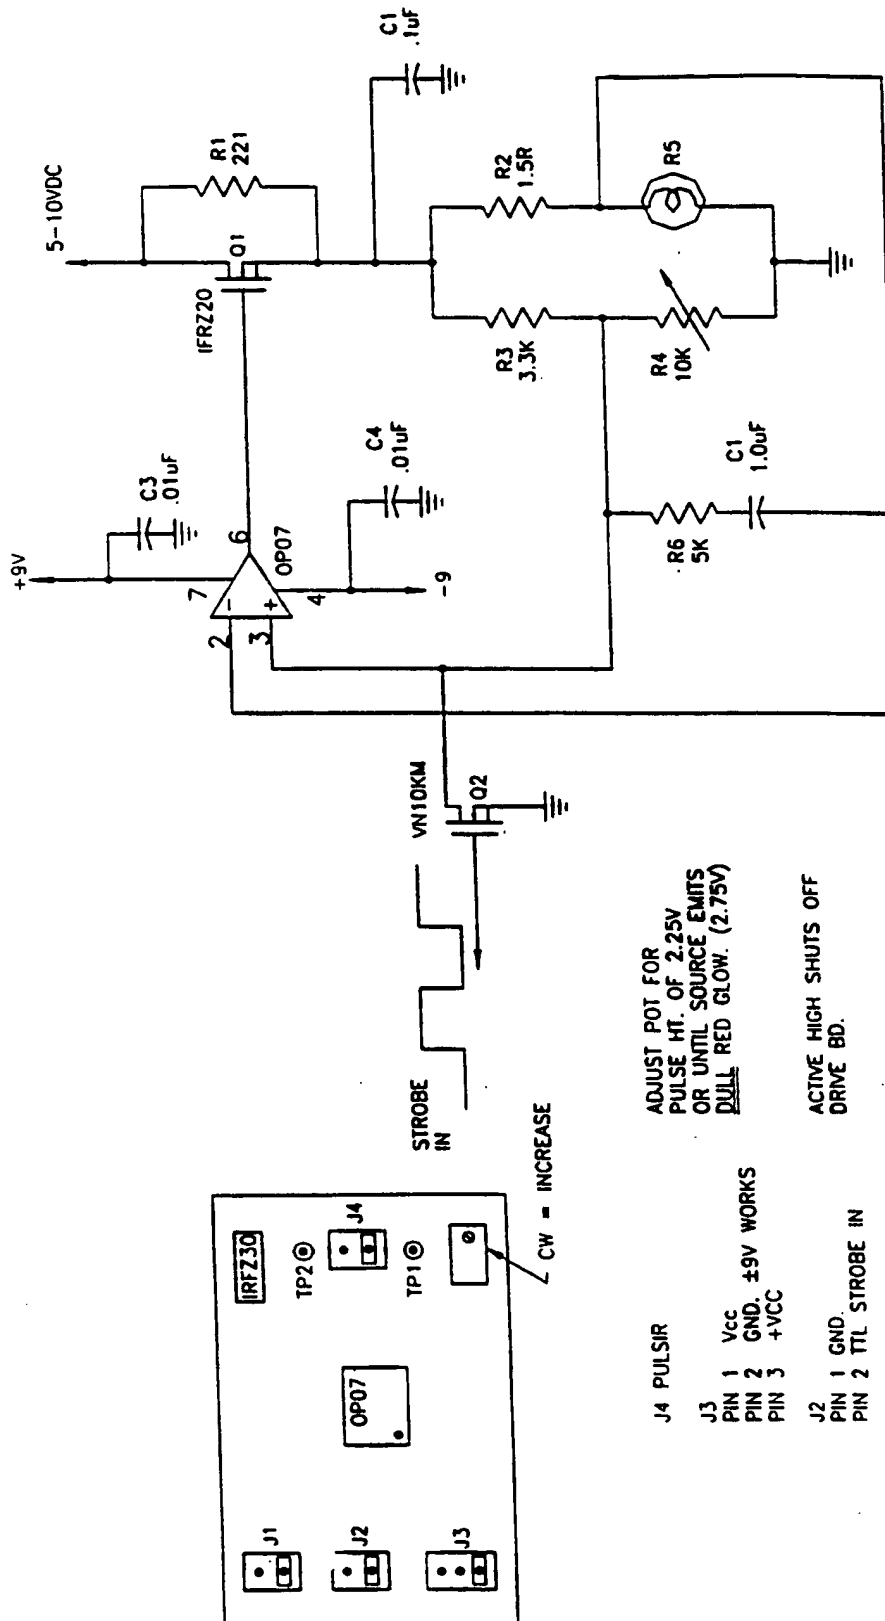

ADJUST POT FOR  
PULSE HT. OF 2.25V  
OR UNTIL SOURCE EMITS  
DULL RED GLOW. (2.75V)

ACTIVE HIGH SHUTS OFF  
DRIVE BD.

J4 PULSIR

J3  
PIN 1 Vcc  
PIN 2 GND. ±9V WORKS  
PIN 3 +VCC

J2  
PIN 1 GND.  
PIN 2 TTL STROBE IN

J1  
PIN 1 GND.  
PIN 2 5-10 VDC

TP1 GND.  
TP2 POWER OUT

FIG. 4

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US98/25771

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) :G01N 21/35; G01J 5/02

US CL :250/339.13

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 250/339.13, 343, 338.4, 339.06

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

U. S. PTO APS

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y,P	US 5,747,808 A (WONG) 05 MAY 1998 (05/05/1998), SEE FIG. 15.	1-18
Y	US 5,508,546 A (ZALAMEDA ET AL) 16 APRIL 1996 (16/04/1996), SEE FIG. 2.	1-18



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G* document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

12 MARCH 1999

Date of mailing of the international search report

08 APR 1999

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

R. HANIG / M. Lillie

Telephone No. (703) 308-4853